


LIGHTSTICK



L bracket

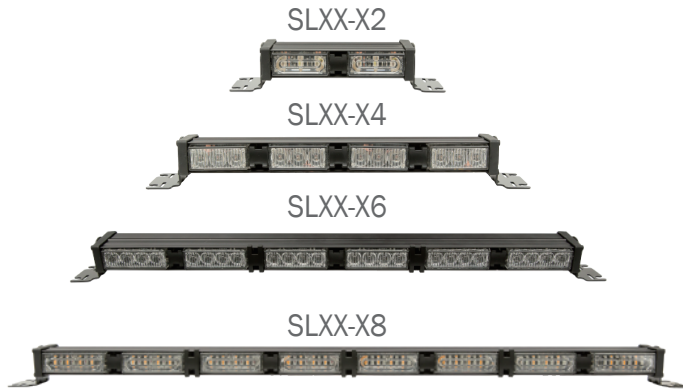

Switch Panel



Control Box



Feature

- Compliance: SAE J595, CA T13
- Ingress Protection Rating: IP67
- High Power: LED*3, 4, 6, 8 / Per Module
- Housing: Aluminum
- Accessories: L bracket (Low or Standard profile), Screw *4, Switch Panel*1 or Control Box*1
- Several optics available:
F (TIR), E (TIR+Diffuser), C (TIR+Diffuser+T13),
L (Linear), S (Linear+Diffuser), R (Linear+Diffuser+Ca T13)
- Function: Standard / Stop / Take down/ DIM / Fast

Single & Split/Dual Color




Specification

Model Name: SL3X/ SL4X series	3or6 LED		4 LED
Input Voltage: 10~30V	2Module	1.0/2.0A max @DC12V	1.6Amps max @DC12V
Synchronizable up to 8 lights	4Module	1.6/3.2A max @DC12V	3.2Amps max @DC12V
Flash Pattern : 25 (2 modules), 31 (4/6/8 modules)	6Module	2.4/4.8A max @DC12V	4.8Amps max @DC12V
Ambient Temperature Range: -30 to 50°C	8Module	3.2/6.4A max @DC12V	6.4Amps max @DC12V
Module: 2, 4, 6, 8			

Input Current

Dimension

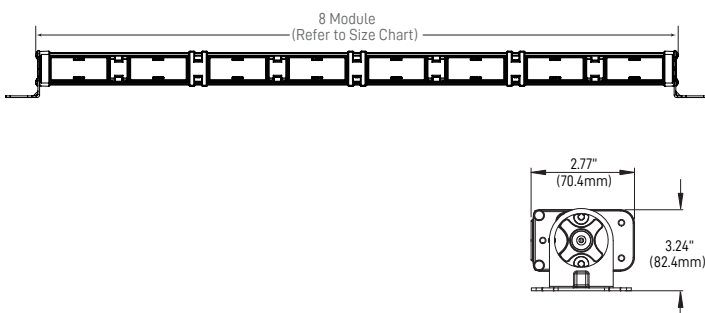

	3or6 LED	4 LED
2Module	7.05" (179mm)	4.57" (116mm)
4Module	14.45" (367mm)	9.14" (232.1mm)
6Module	21.77" (553mm)	18.11" (460mm)
8Module	29.09" (739mm)	26.98" (685.2mm)

