

LIGHTSTICK




FEATURE

- ★ Compliance: SAE J595, CAT13
- ★ Ingress Protection Rating: IP67
- ★ Color Availability: R/B/C/A
- ★ Color Arrangement: Single/Split
- ★ Optics: F/E/C/L/S/R
- ★ Housing: Aluminum
- ★ Accessories: L bracket (Low or Standard profiles), Screw *4, Switch Panel*1 or Control Box*1
- ★ Mounting Option: Permanent
- ★ Function: Standard / Stop / Take down/ DIM / Fast


SPECIFICATION

- ★ Model Number: SL3X/SL4X series
- ★ Input Voltage: 10-30VDC
- ★ Led: 3, 4, 6 or 8 High Power LED/ per module
- ★ Module: 2,4,6,8
- ★ Input Current:
 - 3 or 6 LED 2 module 1.0/2.0A max @DC12V
 - 3 or 6 LED 4 module 1.6/3.2A max @DC12V
 - 3 or 6 LED 6 module 2.4/4.8A max @DC12V
 - 3 or 6 LED 8 module 3.2/6.4A max @DC12V
 - 4 LED 2 module 1.6A max @DC12V
 - 4 or 6 LED 4 module 3.2A max @DC12V
 - 4 LED 6 module 4.8A max @DC12V
 - 4 LED 8 module 6.4A max @DC12V
- ★ Ambient Temperature Range: -30 to 50°C
- ★ Flash Pattern: 25 (2 modules)/31 (4/6/8 modules)
- ★ Size: 70.4mm W x 198.4mm L x 82.4mm H
 70.4mm W x 387.2mm L x 82.4mm H
 70.4mm W x 575.9mm L x 82.4mm H
 70.4mm W x 764.6mm L x 82.4mm H

OPTICS OPTIONS

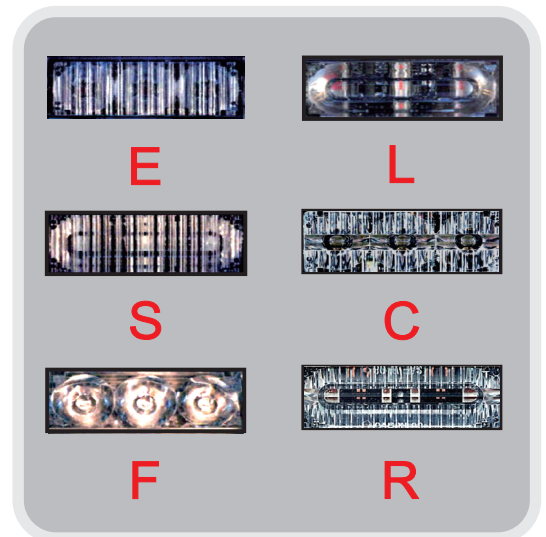

Accessories

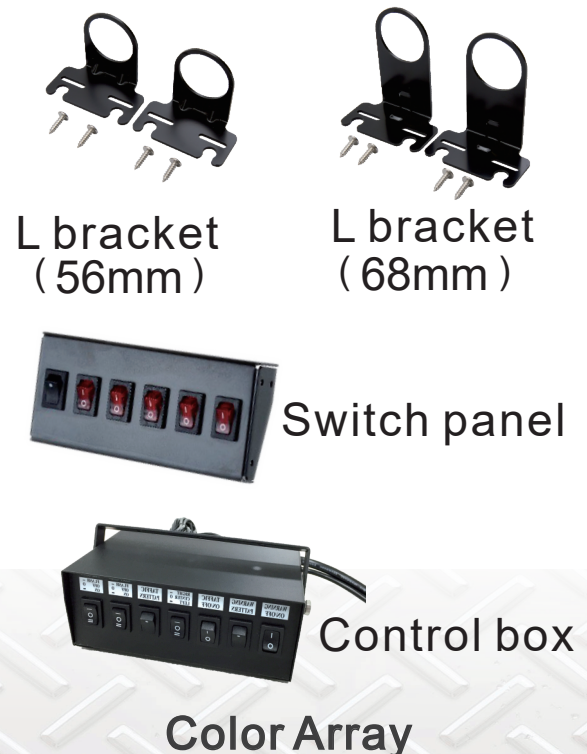

Single



Split



www.topwarninglight.com

TOP WARNING LIGHT TECHNOLOGY CO., LTD.